




INTERBOX s.a. - Via dei Balconi, 11 - CH 6917 BARBENGO (LUGANO)

TEL. +41 (0)91 9945545 - FAX. +41 (0)91 9942260 - e-mail: info@interbox.ch - www.interbox.ch

INDOOR AND OUTDOOR PAVING SYSTEMS / FLOOR MAT ELEMENTS

EPSILON SERIES

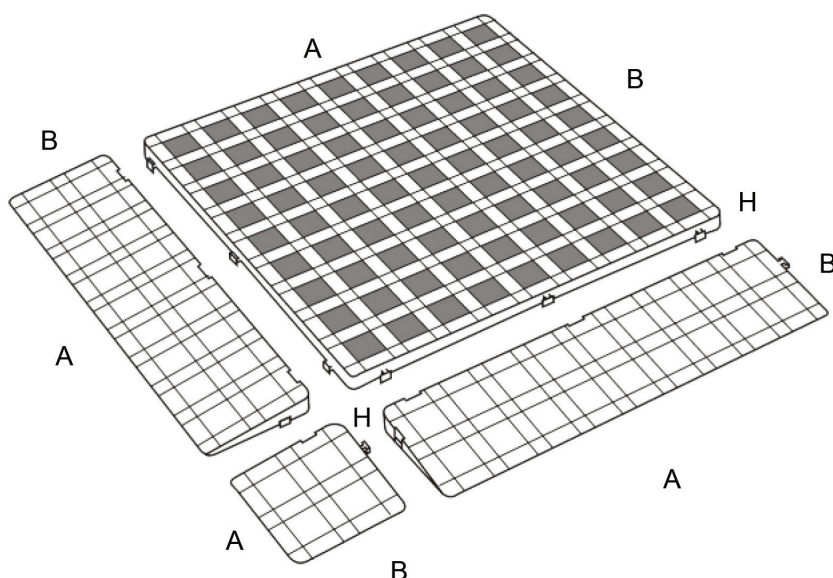

The modular Epsilon grating is insulating and easy to lay, thanks to the system hooking all various elements one to another. wlt enables the creation of antislip flooring in all sizes. Tested for an operating voltage of up to 3 kV and a yield load of 840 kN per m². The working load is 210–280 kN per m², with the load evenly distributed. Epsilon comes complete with a side and corner joint for even more functional floor paving.

Accessories:

Peripheric ramp side male clutch and female clutch, corner.

Colours:

-  Virgin polymer Light Brown
-  Virgin polymer Black
-  Virgin polymer Green
-  Virgin polymer Neutral
-  Virgin polymer RAL 3020
-  Virgin polymer RAL 5002
-  Virgin polymer Black P.P.

Material:

 Virgin polymer suitable for food contact but without a MOCA certificate.

Inert to acids and solvents.

Size

ARTICLE	SIZE		
	A	B	H
Epsilon	500	500	25
Side Male Clutch	500	130	6/25
Side Female Clutch	500	130	6/25
Corner	130	130	6/25

The sales office is at your disposal to advise the version most suited to your needs.

EPSILON 04.02.711026 ING

The company reserves the right to alter the characteristics of its products without notice.
All values expressed are nominal with a tolerance of the 1.5%± for Food Contact light Brown, Black, Green, Neutral, Red and Blue.